

Statement  
LUXURY



*Transform your home...*

— 600X1200MM —

High Gloss  
COLLECTION

# High Gloss COLLECTION

600X1200MM



— GVT & PGVT —







With the HIGH GLOSS COLLECTION, revel in tile surfaces that boast unparalleled smoothness and brightness. These tiles excel in their resistance to abrasion during cleaning. While a glossy coating may accentuate surface imperfections, these tiles exhibit remarkable durability and are highly resistant to staining and dirt accumulation.

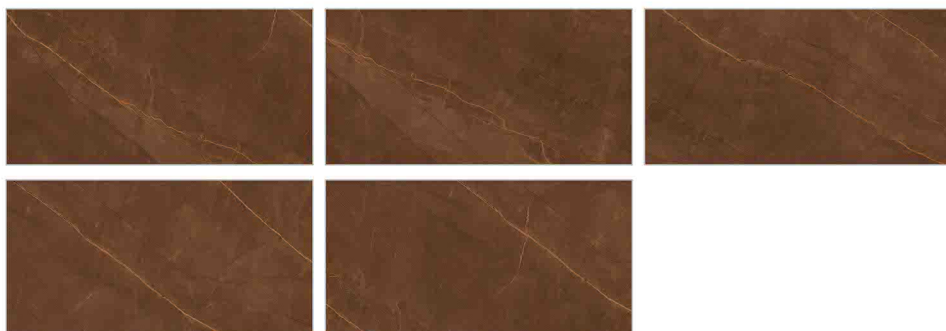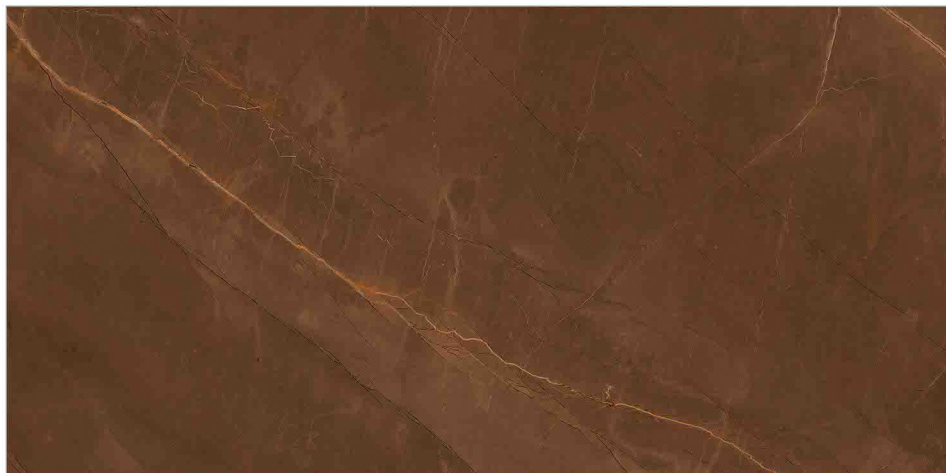

# ARMANI BRONZE

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 05





-  LIQUID REPELLENT
-  STAIN RESISTANT
-  SCRATCH RESISTANT
-  FIRE RESISTANT
-  RESISTANT TO UV RAYS
-  IMPACT RESISTANT
-  FROST RESISTANT




# ASTANA BLUE

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 03

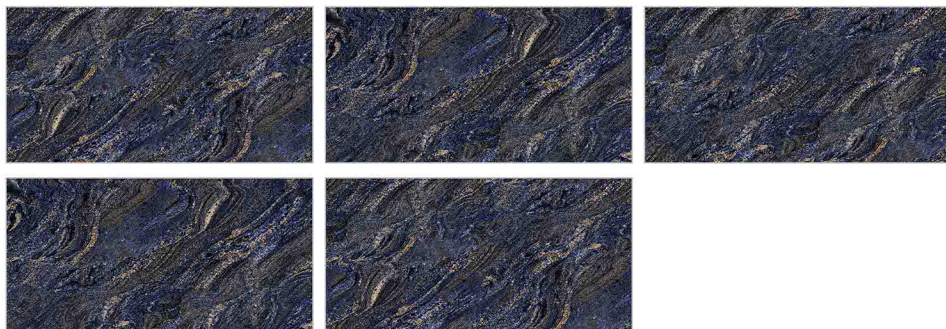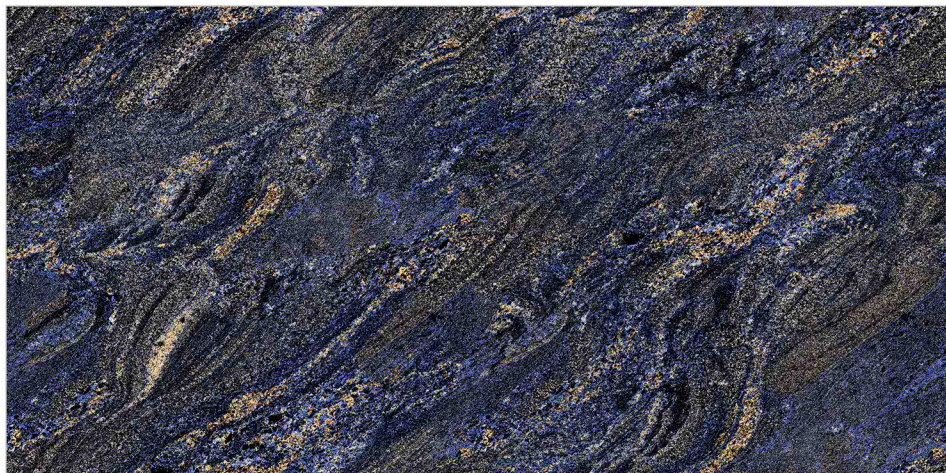

# AVANA AZUL

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 03

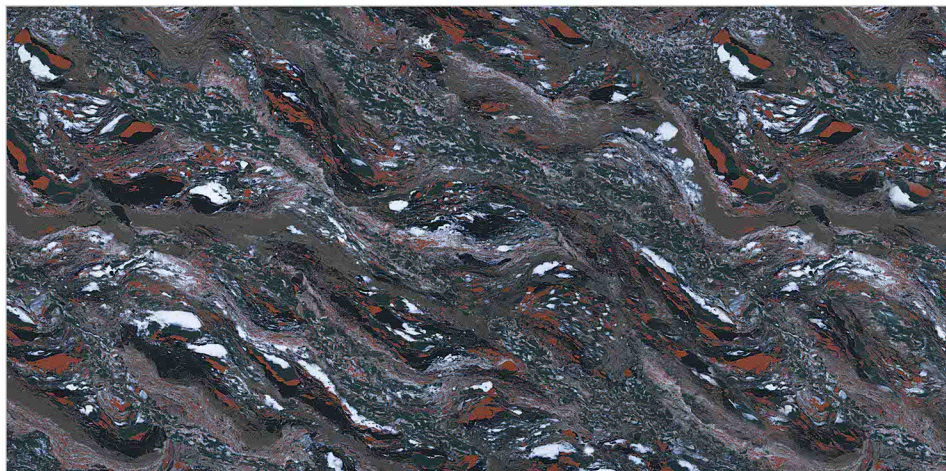

LIQUID REPELLENT



STAIN RESISTANT



SCRATCH RESISTANT



FIRE RESISTANT







RESISTANT TO UV RAYS



IMPACT RESISTANT



FROST RESISTANT




# BLUE BAHIA

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 05




- LIQUID REPELLENT
- STAIN RESISTANT
- SCRATCH RESISTANT
- FIRE RESISTANT
- RESISTANT TO UV RAYS
- IMPACT RESISTANT
- FROST RESISTANT

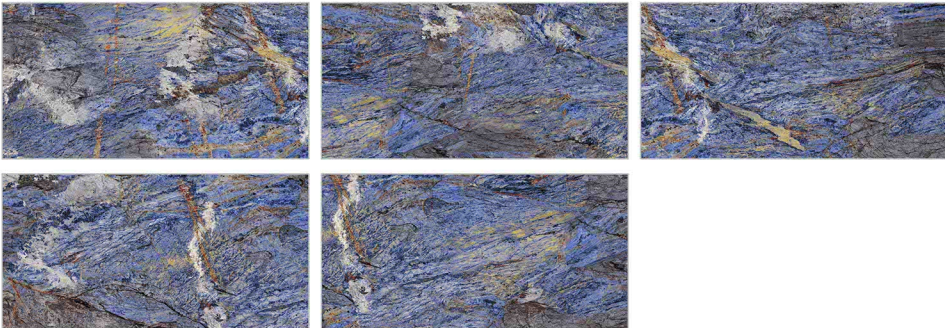

# DEVON BROWN

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 05

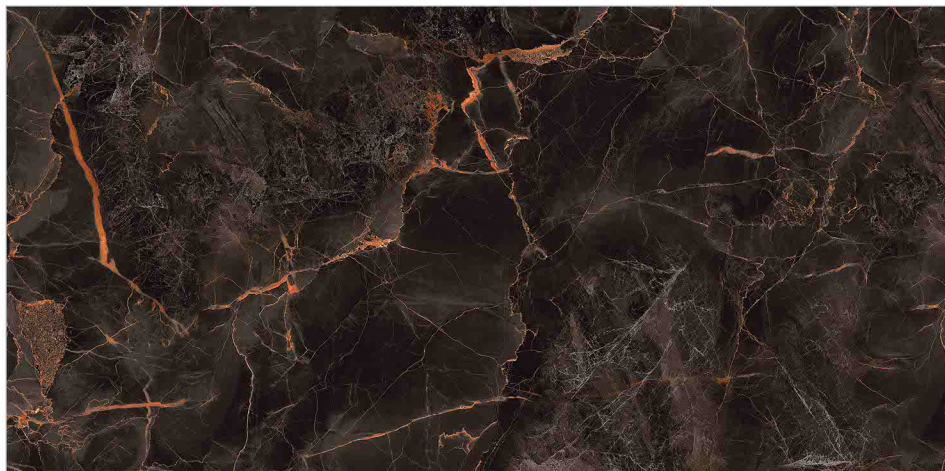

LIQUID REPELLENT



STAIN RESISTANT



SCRATCH RESISTANT



FIRE RESISTANT







RESISTANT TO UV RAYS



IMPACT RESISTANT





FROST RESISTANT



# ELIZA CHOCO


Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 05

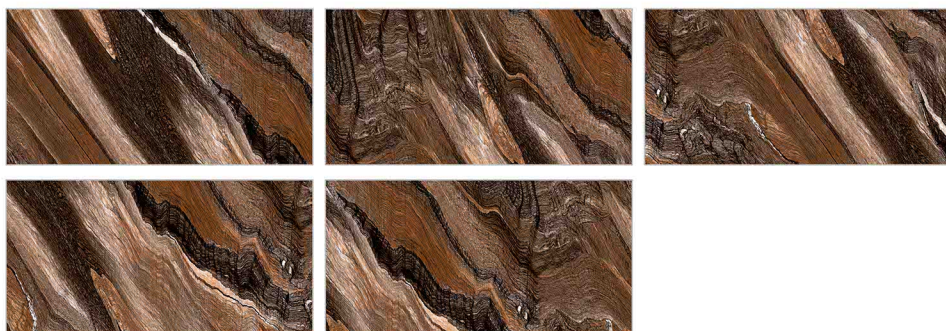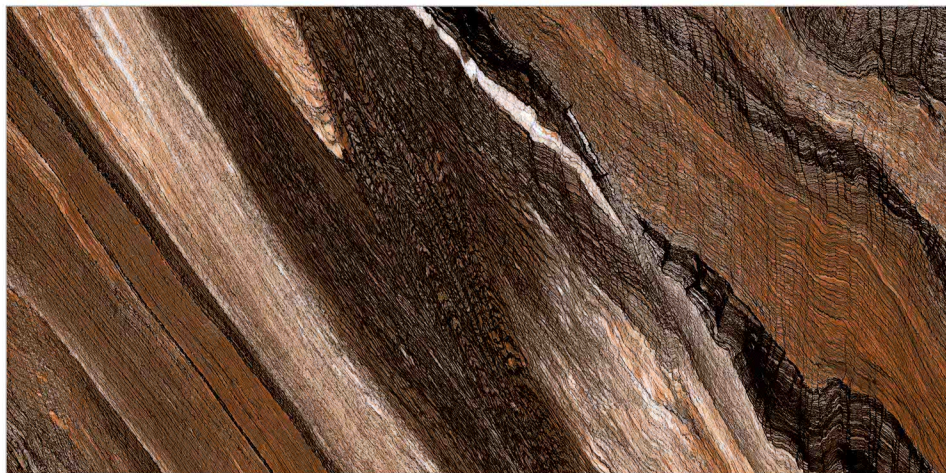




# EMPERADOR BROWN

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 05


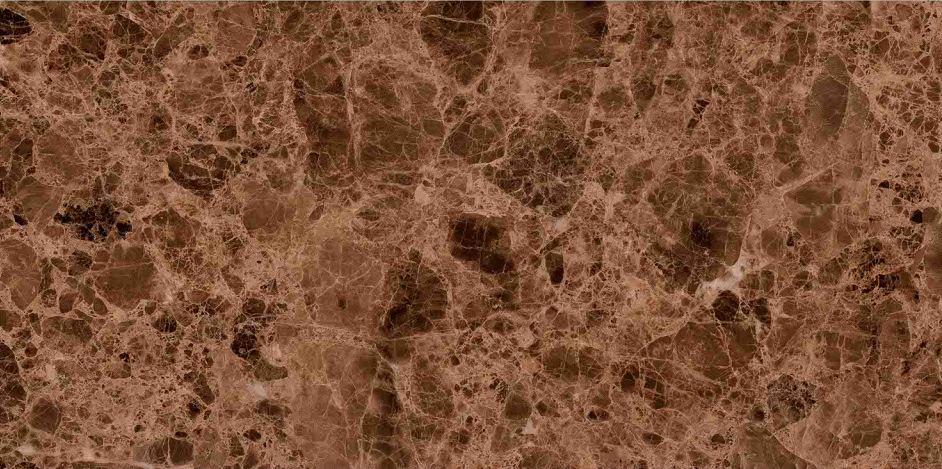


- LIQUID REPELLENT
- STAIN RESISTANT
- SCRATCH RESISTANT
- FIRE RESISTANT
- RESISTANT TO UV RAYS
- IMPACT RESISTANT
- FROST RESISTANT

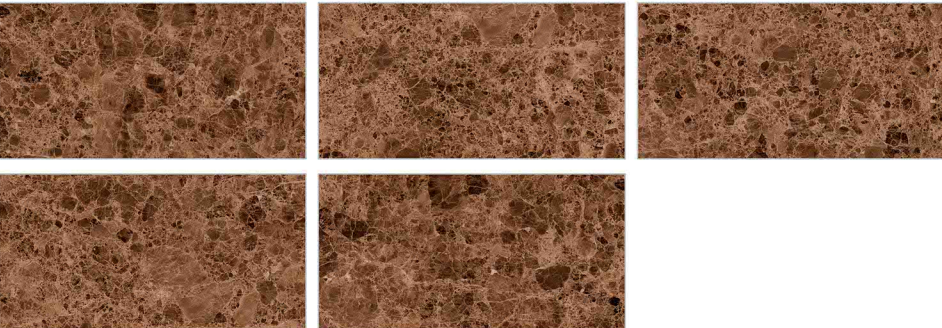

# EMPREDOR HONEY

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 03

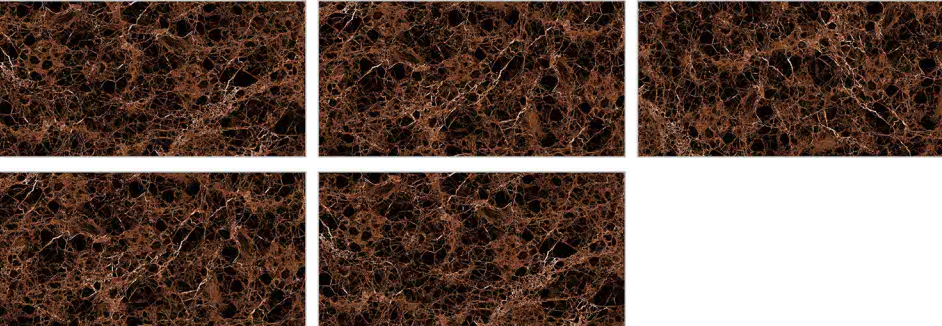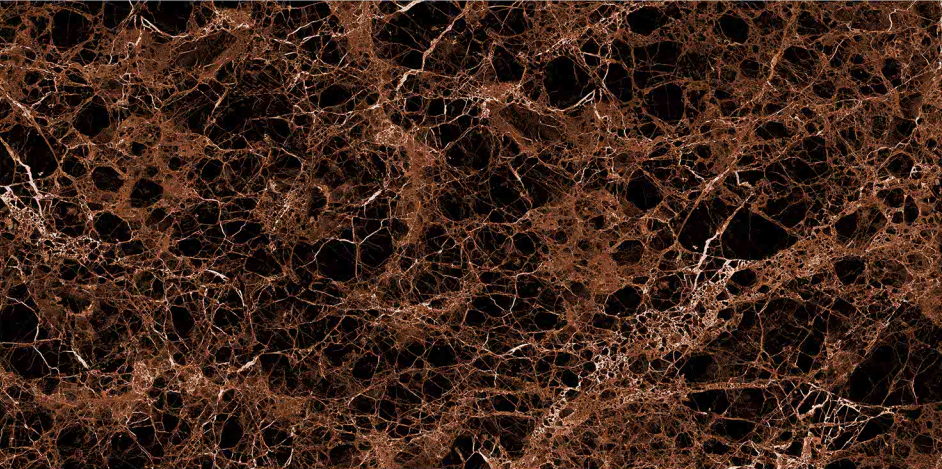


- LIQUID REPELLENT
- STAIN RESISTANT
- SCRATCH RESISTANT
- FIRE RESISTANT
- RESISTANT TO UV RAYS
- IMPACT RESISTANT
- FROST RESISTANT




# ESTRADA

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 05

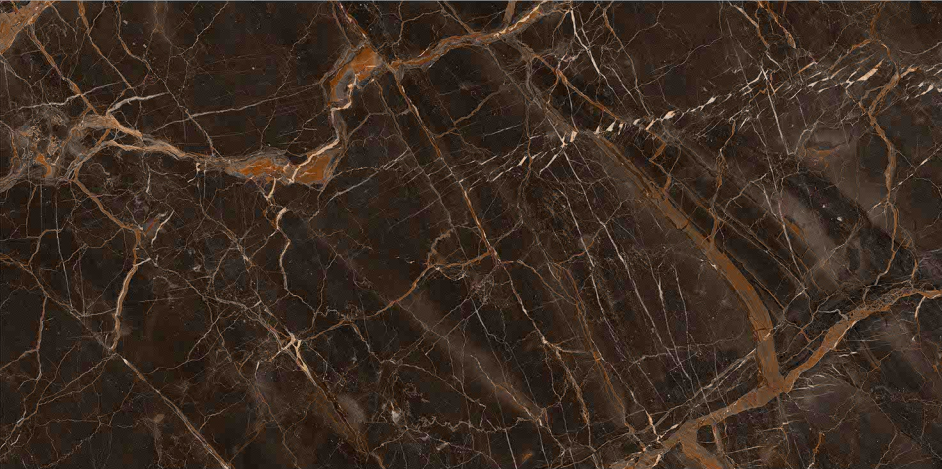

- LIQUID REPELLENT
- STAIN RESISTANT
- SCRATCH RESISTANT
- FIRE RESISTANT
- RESISTANT TO UV RAYS
- IMPACT RESISTANT
- FROST RESISTANT

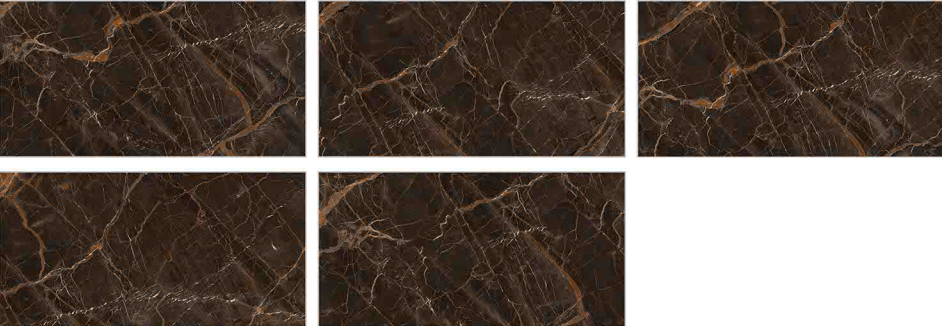

# FONTANA BLUE

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 03




# FONTANA BROWN

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 03




-  LIQUID REPELLENT
-  STAIN RESISTANT
-  SCRATCH RESISTANT
-  FIRE RESISTANT
-  RESISTANT TO UV RAYS
-  IMPACT RESISTANT
-  FROST RESISTANT

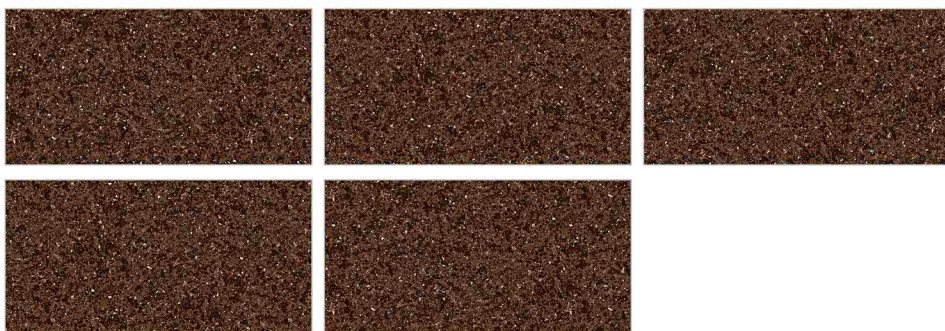

# GRANADO NATURAL

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 03

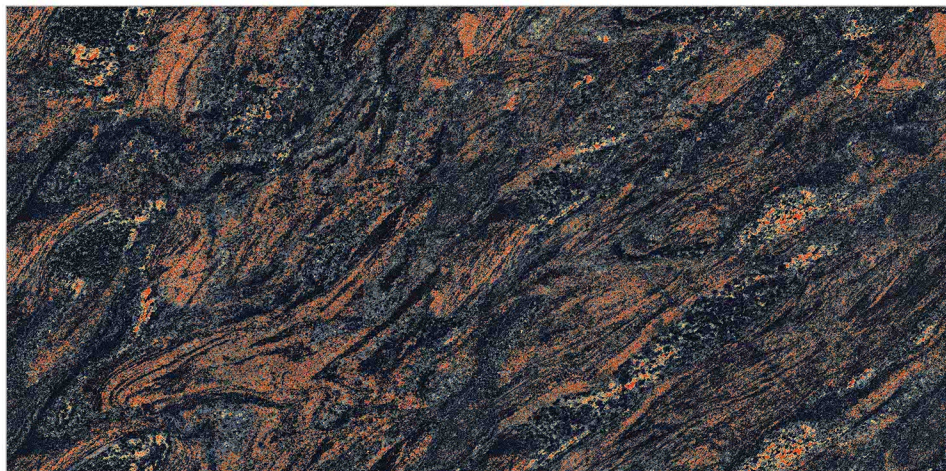

LIQUID  
REPELLENT



STAIN  
RESISTANT



SCRATCH  
RESISTANT



FIRE  
RESISTANT




RESISTANT  
TO UV RAYS



IMPACT  
RESISTANT





FROST  
RESISTANT

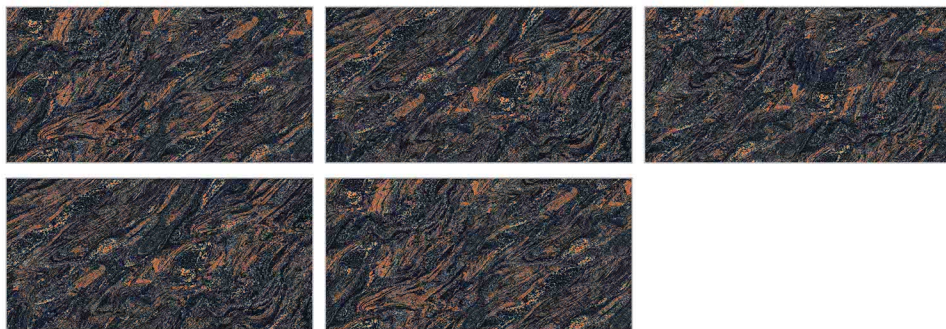


# HEXA BLUE

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 03

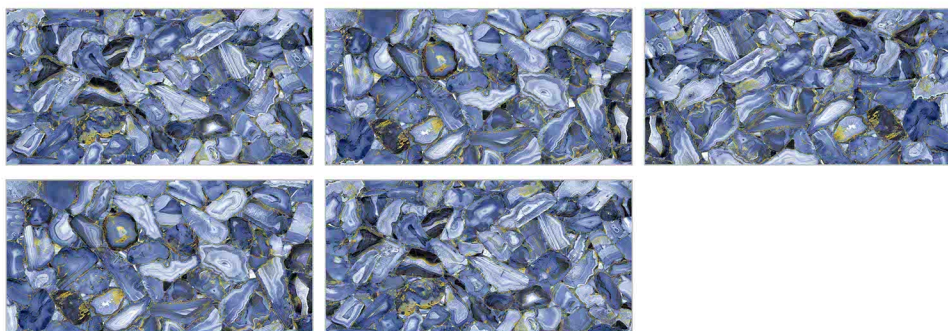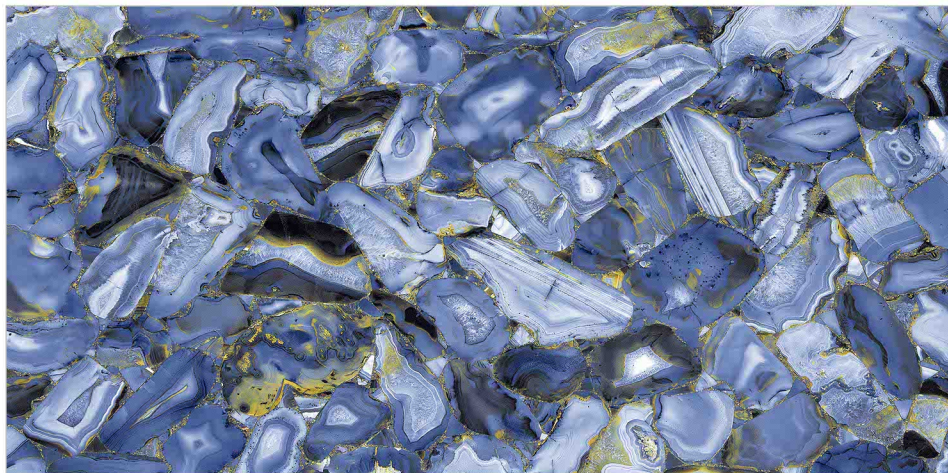

# LINZ BLUE

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 03

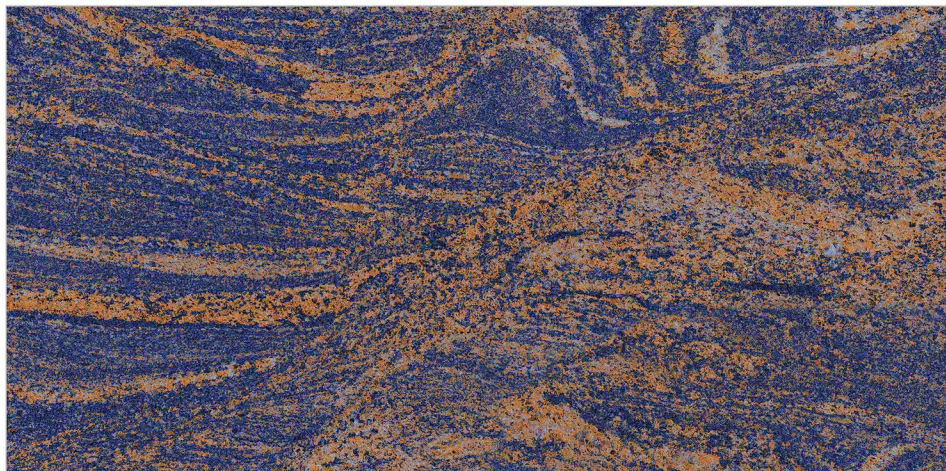

LIQUID REPELLENT



STAIN RESISTANT



SCRATCH RESISTANT



FIRE RESISTANT




RESISTANT TO UV RAYS



IMPACT RESISTANT





FROST RESISTANT

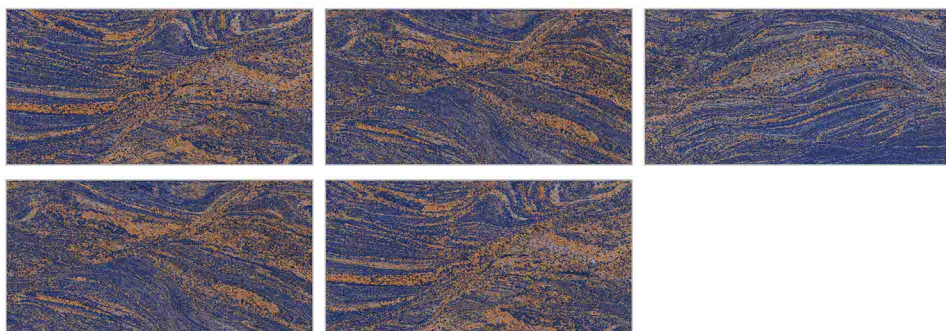



# NEVADA MULTY

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 05

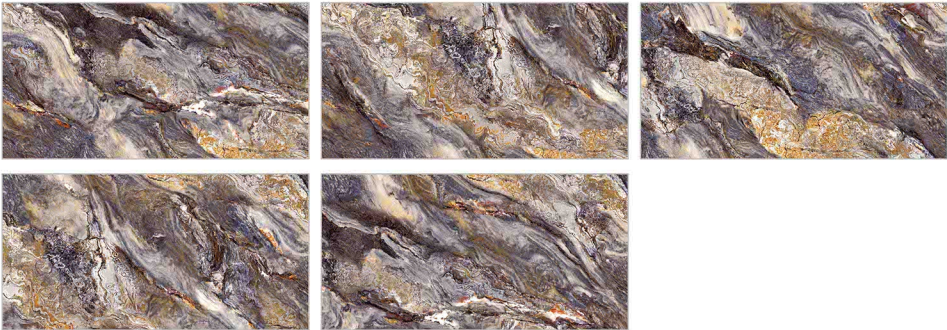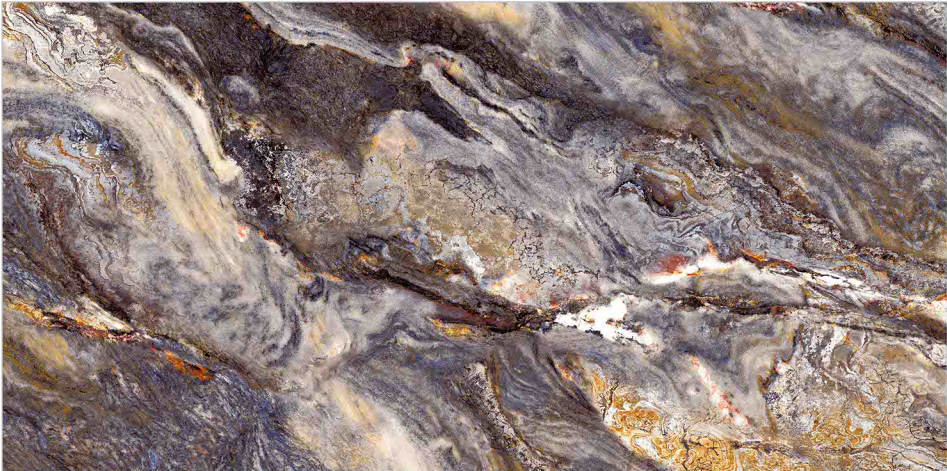


- LIQUID REPELLENT
- STAIN RESISTANT
- SCRATCH RESISTANT
- FIRE RESISTANT
- RESISTANT TO UV RAYS
- IMPACT RESISTANT
- FROST RESISTANT



# NIOMI BLUE

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 05

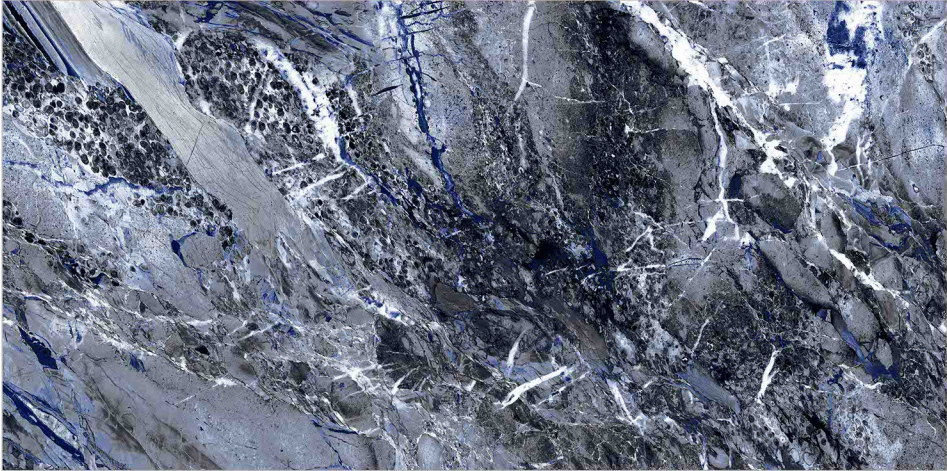

LIQUID REPELLENT



STAIN RESISTANT



SCRATCH RESISTANT



FIRE RESISTANT




RESISTANT TO UV RAYS



IMPACT RESISTANT





FROST RESISTANT

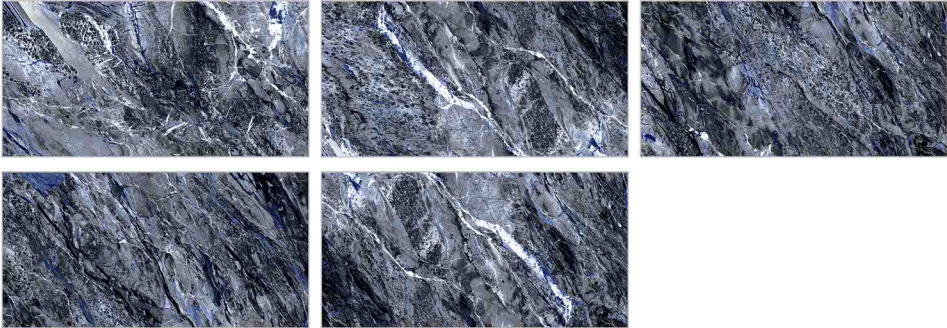

# NOVA RED

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 03

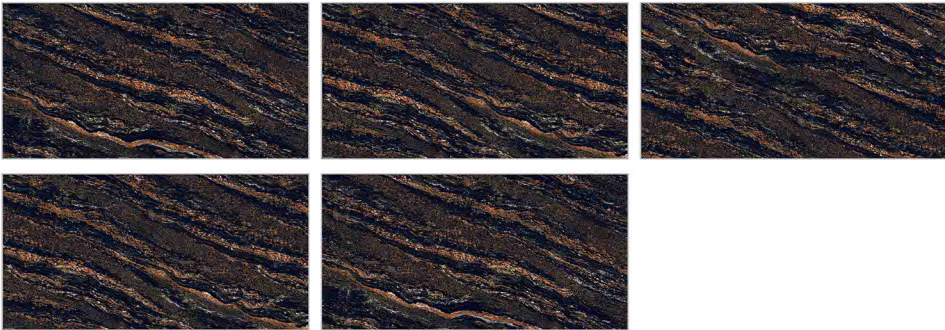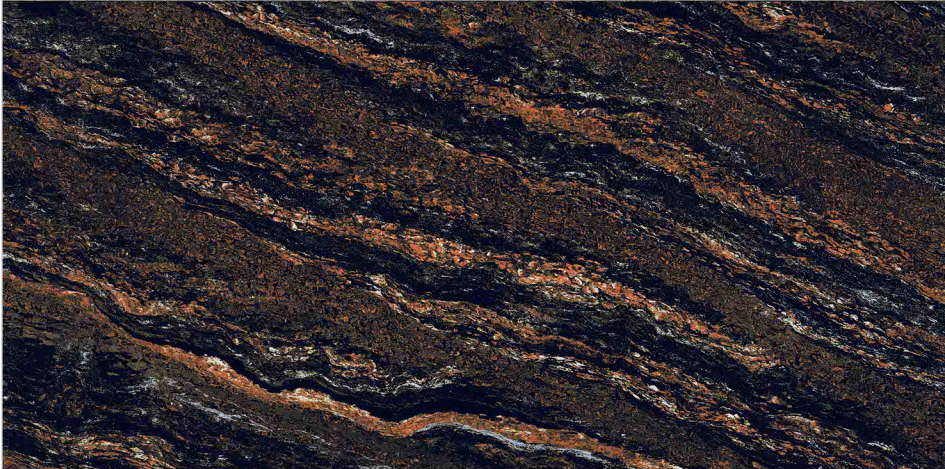

- LIQUID REPELLENT
- STAIN RESISTANT
- SCRATCH RESISTANT
- FIRE RESISTANT
- RESISTANT TO UV RAYS
- IMPACT RESISTANT
- FROST RESISTANT



# ROMA AQUA

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 03



LIQUID  
REPELLENT



STAIN  
RESISTANT



SCRATCH  
RESISTANT



FIRE  
RESISTANT








RESISTANT  
TO UV RAYS



IMPACT  
RESISTANT




FROST  
RESISTANT




# ROMA GOLD

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 03

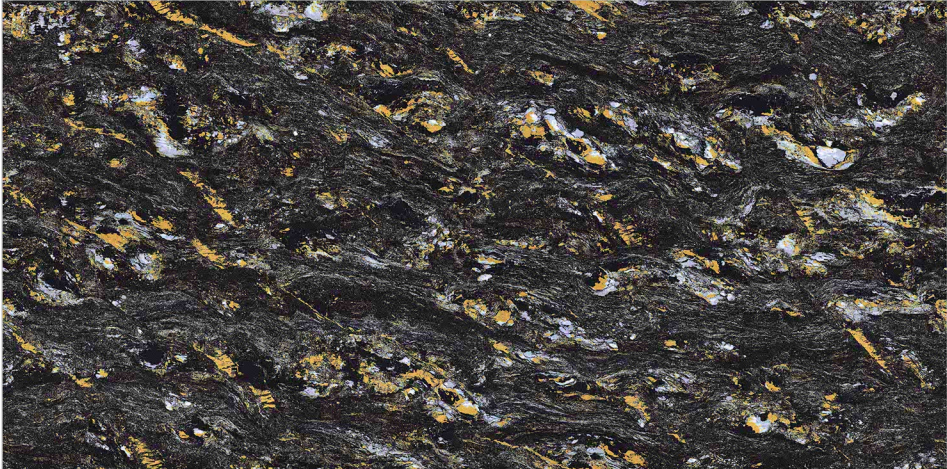


- LIQUID REPELLENT
- STAIN RESISTANT
- SCRATCH RESISTANT
- FIRE RESISTANT
- RESISTANT TO UV RAYS
- IMPACT RESISTANT
- FROST RESISTANT

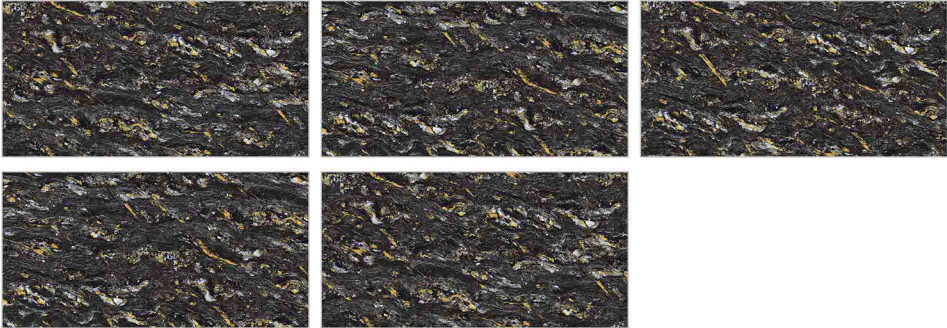


# TOSCANA BLUE

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 05


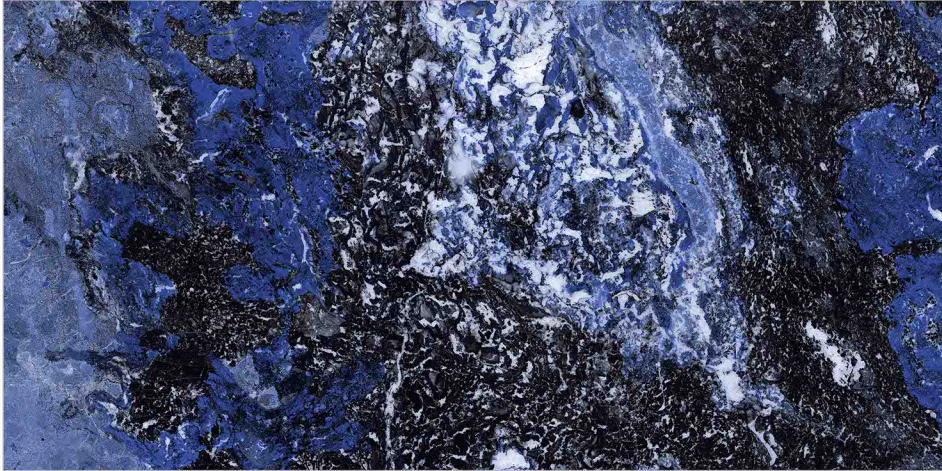


- LIQUID REPELLENT
- STAIN RESISTANT
- SCRATCH RESISTANT
- FIRE RESISTANT
- RESISTANT TO UV RAYS
- IMPACT RESISTANT
- FROST RESISTANT

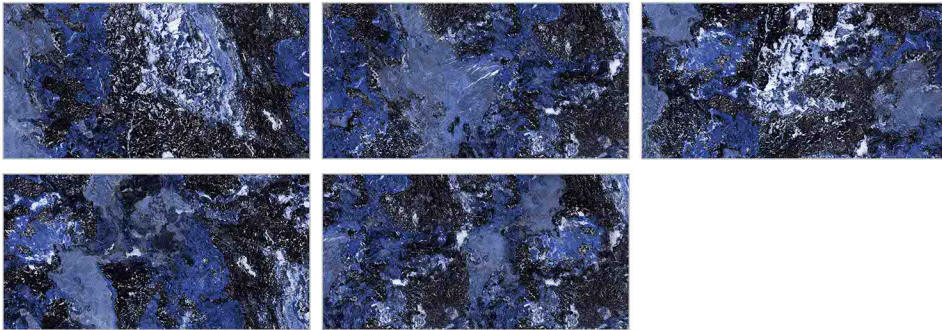



# TROPICAL BLUE

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 05

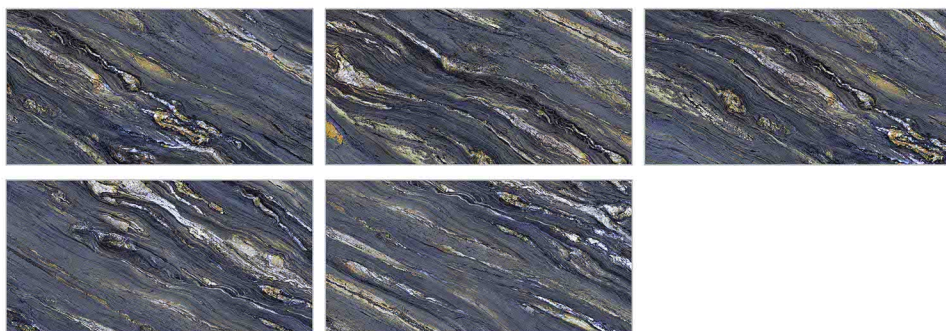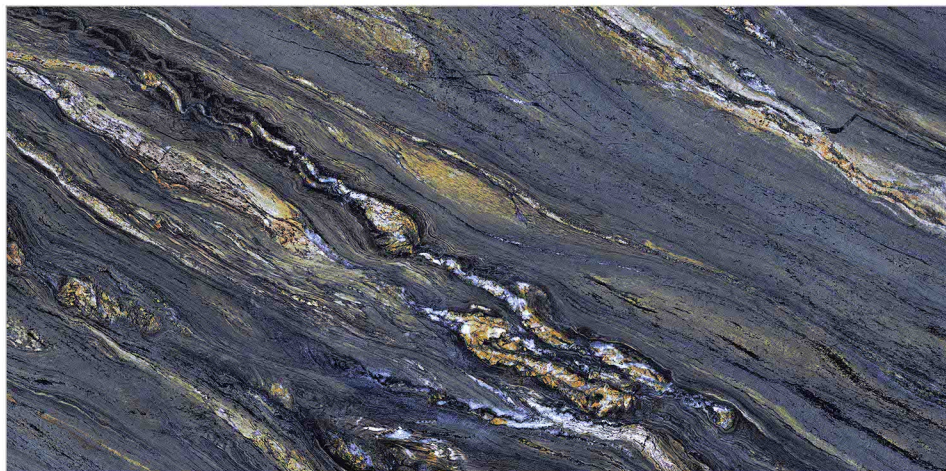

# TROPICAL GRAFITO


Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 05

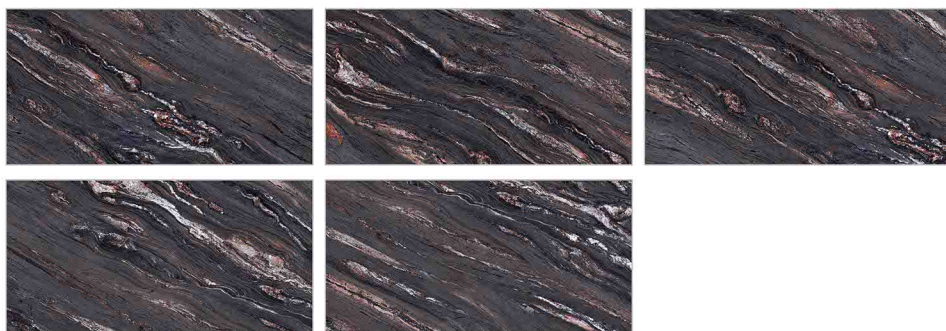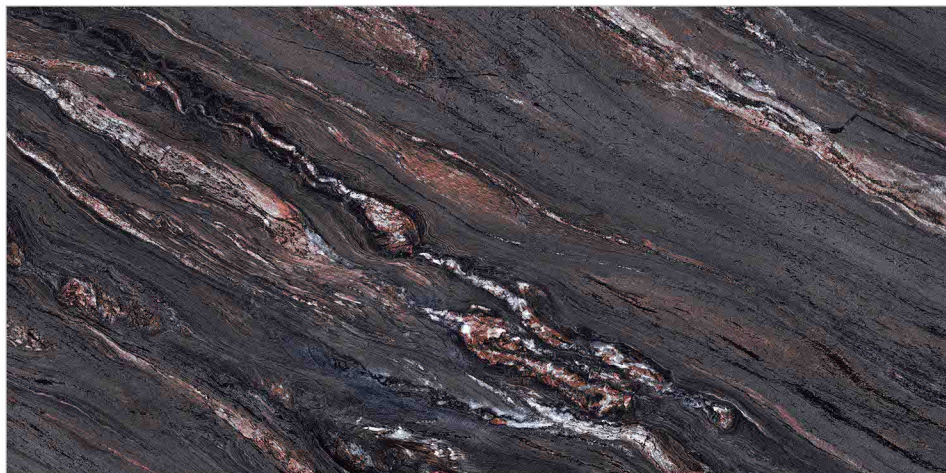



# VOLCANO BLUE

Size : 600x1200mm  
Finish : HIGH GLOSS  
Random : 05

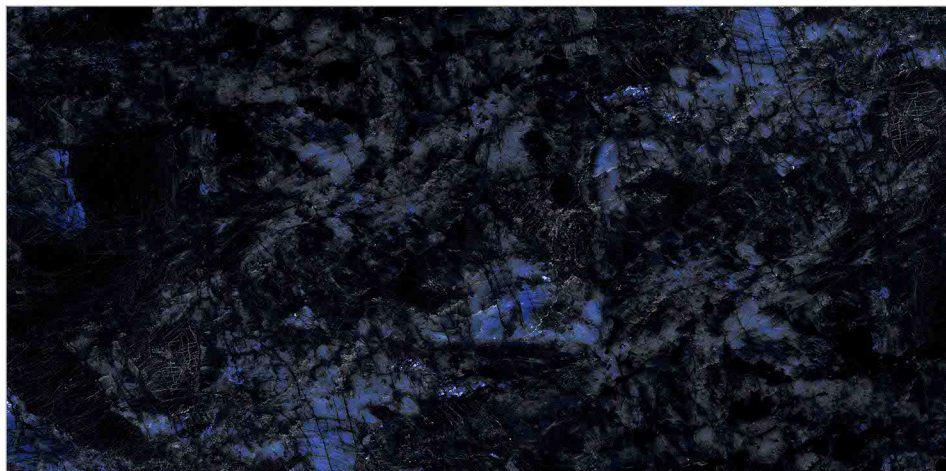

LIQUID REPELLENT



STAIN RESISTANT



SCRATCH RESISTANT



FIRE RESISTANT







RESISTANT TO UV RAYS



IMPACT RESISTANT



FROST RESISTANT



# GLAZED VITRIFIED TILES

## 600x1200 mm

TECHNICAL SPECIFICATION FOR 600x1200MM GVT TILES				
Characteristics	Requirement as per IS 15622 : 2017 < E ≤ 0.08 Group Bla	Requirement as per ISO 13006 ≤ 0.5% Group Bla	Our Values	Test Method
<b>A) Dimension &amp; Surface Quality</b>				
<b>I) Length &amp; Width</b>	± 0.1%	± 0.3%	± 0.1%	IS 13630 Part 1/ ISO 10545-2
<b>ii) Thickness</b>	± 5.0%	± 5.0%	± 4.0%	
<b>iii) Straightness of Side</b>	± 0.1%	± 0.3%	± 0.1%	
<b>iv) Rectengularity</b>	± 0.1%	± 0.3%	± 0.1%	
<b>v) Surface Flatness</b>				
<b>a) Center curvature (%) ( max.Deviation)</b>	± 0.5%	± 0.4%	± 0.2 %	
<b>b) Edge curvature (%) { max.Deviation)</b>	± 0.5%	± 0.4%	± 0.2 %	
<b>c) Corner warpage (%) ( max.Deviation)</b>	± 0.5%	± 0.4%	± 0.2 %	
<b>vi) Surface Quality</b>	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
<b>B) Physical Properties</b>				
<b>I) Water Absorption</b>	Av E ≤ 0.08 %, Individual 0.1 max	Av ≤ 0.5 %, Individual 0.6% max	Avg. E≤ 0.08 %	IS 13630 Part 2/ ISO 10545-3
<b>ii) Modulus of Rupture [N/mm<sup>2</sup>]</b>	Av 35, Individual 32 min	Av 35, Individual 32 min	Avg, 35 Ind 32	IS 13630 Part 6/ISO 10545-4
<b>iii) Breaking Strength in N</b>	Min. 1300	Min. 1300	Min. 1300	
<b>iv) Moisture Expansion in mm/m</b>	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO-10545-10
<b>v) Scratch Hardness of surface (Mohs)</b>	Min 5	N/A	Min.5 (for VC & RT), Min.3 (for Polished)	IS 13630 Part 13
<b>vi) Resistance to Abrasion of glazed tiles( Class I to V )</b>	Min II	Abrasion Class & Cycle passed	Class-V (for VC & RT), Class-III (for Polished)	IS 13630 Part 11 /ISO 10545-7
<b>vii) Coefficient of linear thermal expansion from embiant temperature to 100° C</b>	6 X 10 <sup>-6</sup> K <sup>-1</sup> Max	Test Method Available	Max 6 X 10 <sup>-6</sup> K <sup>-1</sup> max	IS 13630 Part 4/ ISO 10545-8
<b>viii) Thermal Shock Resistance</b>	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9
<b>ix) Crazing Resistance</b>	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11
<b>x) Impact Resistance as Co-efficient of Re stitution</b>	0.55 min	Required	Min 0.55	ISO 10545-5
<b>xi) Frost Resistance</b>	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
<b>C) Chemical Resistance (glazed Tiles)</b>				
<b>I) Stain Resistance</b>	Min Class 1	Min Class 3	Min Class-1	IS 13630 Part 8 &ISO 10545-14
<b>ii) Resistance to household chemicals</b>	Min Class AA	Min Class GB	Min Class AA	IS 13630 Part 8/ ISO 10545-13
<b>iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)</b>	Required if agreed	Declared Value <sup>1</sup>	Min Class AA	

PACKING DETAIL FOR 600x1200MM GVT TILES				
Nominal Size	Thickness(mm)	Average weight per carton (Kgs)	No. of tiles per carton	Coverage area per carton
600x1200mm	9.0 (Approx)	28.00 (Approx)	2	1.44sq.mtr./15.50sq.ft.

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. " Technical Specification" for Arkstone wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixd. Complaints will not be entertained for Borders, Highlighters & Motifs.

**THANK YOU**